


Trauma Implant System

FDA APPROVED BY INDIAN STANDARD

AN ISO 13485 : 2012 COMPANY

A Jointless Joint

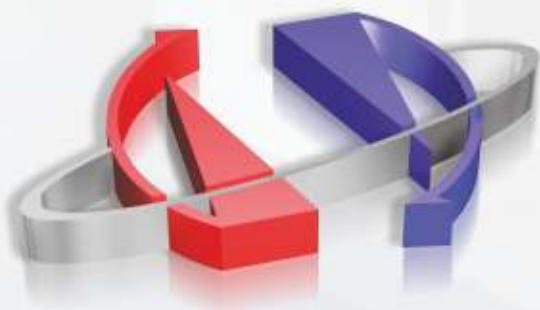

NEBULA[®]

CE₁₀₂₃



NEBULA®

PROFILE

We are Partner of your orthopaedic needs. We give assurance of quality, performance and value. We manufacture full range of orthopaedic implants and instruments, specifically trauma implants, intramedullary nailing system, locking compression plates, external fixator, ilizarow system etc..

We had facility of modern technology in manufacturing unit i.e. CNC Machines, Thread Grinding Machines. We had ISO 9001:2000 & CE Certified approved quality. We use Stainless Steel & Titanium Grade-V (Ti6AL-4VELI) Alloy for manufacturing implants.





Cat. 101

Length : 60 mm To 150 mm

AUSTIN MOORE PIN WITH 2 NUTS



Cat. 106

Length : 6.5 mm :- 35 mm To 120 mm
7.0 mm :- 40 mm To 125 mm

CANNULATED CANCELLOUS SCREW HEX
Dia.: 6.5 mm, 7.0 mm (32mm Thread)



Cat. 101.s

Length : 33 mm, 35 mm, 37 mm,
39 mm, 41 mm

SHOULDER PROSTHESIS



Cat. 107

Length : 35 mm To 120 mm

CANNULATED CANCELLOUS SCREW HEX
Dia.: 6.5 mm, 7.0 mm (Fully Thread)



Cat. 102

Dia. : 37 mm To 55 mm

AUSTIN MOORE PROSTHESIS XL



Cat. 108

WASHER FOR C.C. & CANCELLOUS SCREW
Small 4.0 mm, Large 6.5 mm



Cat. 103

Length : 14 mm To 35 mm
40 mm To 80 mm

CANNULATED CANCELLOUS SCREW HEX
Dia.: 4.0 mm (16 mm Thread)



Cat. 109

Length : 50 mm To 120 mm

D.H.S. LEG SCREW (A.O. TYPE)



Cat. 104

Length : 14 mm To 35 mm
40 mm To 80 mm

CANNULATED CANCELLOUS SCREW HEX
Dia.: 4.0 mm (Fully Thread)



Cat. 109.P

Length : 50 mm To 80 mm

PEDIATRIC D.H.S. LEG SCREW (A.O. TYPE)



Cat. 105

Length : 25 mm To 120 mm

CANNULATED CANCELLOUS SCREW HEX
Dia.: 6.5 mm, 7.0 mm (16 mm Thread)



Cat. 110 Hole : 03 To 14
D.H.S. SHORT/LONG BARREL PLATE (ROUND HOLE) A.O. TYPE
Angle : 120° To 150°



Cat. 112.T Hole : 04
TROCHANTERIC STABILIZATION PLATE FOR D.H.S.



Cat. 111 Hole : 03 To 12
D.H.S. LONG/SHORT BARREL PLATE (D.C.HOLE) A.O. TYPE
Angle : 125° To 140°



Cat. 113 Hole : 05 To 16
95° ANGLE BLADE PLATE (ROUND HOLE) A.O. TYPE
Blade Length : 60 mm To 80 mm



Cat. 111.D Hole : 04 To 06
D.H.S. PEDIATRIC PLATE (D.C.HOLE) A.O. TYPE
Angle : 120°



Cat. 114 Hole : 05 To 16
95° ANGLE BLADE PLATE (D.C. HOLE)
Blade Length : 60 mm To 80 mm



Cat. 111.P Hole : 03 To 06
D.H.S. PEDIATRIC PLATE (D.C.HOLE) A.O. TYPE
Angle : 130° To 135°



Cat. 114.D55-70 Hole : 04 To 06
120° ANGLE BLADE PLATE (D.C.)
Blade Length : 55 mm To 70 mm



Cat. 112 Hole : 04,05,06
D.H.S. PLATE S.B./L.B. (TROCHANTERIC SUPPORT) ROUND HOLE
Angle : 130° To 135°



Cat. 115 Hole : 05 To 18
95° D.C.S. BARREL PLATE (ROUND HOLE)



Cat. 112.D Hole : 04,05,06
D.H.S. PLATE S.B./L.B. (TROCHANTERIC SUPPORT) DC HOLE
Angle : 130° To 135°



Cat. 116 Hole : 05 To 14
95° D.C.S. BARREL PLATE (D.C. HOLE)



Cat. 117

Hole : 04 To 12

1/3 TUBULAR PLATE



Cat. 121.03

Hole : 02 To 08

SMALL "T" PLATE (HEAD 03 HOLE)



Cat. 118

Hole : 04 To 12

SMALL D.C. PLATE



Cat. 121.04

Hole : 02 To 08

SMALL "T" PLATE (HEAD 04 HOLE)



Cat. M118

Hole : 05 To 12

LM SMALL D.C. PLATE



Cat. 122

Hole : 02 To 08

OBLIQUE "T" PLATE



Cat. 118.H

Hole : 04 To 12

HOOK PLATE



Cat. 123

Hole : 03 To 16

RECONSTRUCTION PLATE (ROUND HOLE)
For 3.5 mm Screw



Cat. 119

Hole : 04 To 12

SMALL L.C.D.C. PLATE



Cat. 123.PC

Hole : 04 To 14
(2 Hole Variation)

PELVIC CURVED PLATE 3.5 MM
For 3.5 mm Screw



Cat. 120

Hole : 02 To 06

ELLIS PLATE



Cat. 123.PC

Hole : 04 To 20
(2 Hole Variation)

PELVIC STRAIGHT PLATE 3.5 MM
For 3.5 mm Screw



Cat. 123.S

PELVIC SYMPHYSEAL PLATE 3.5 MM
For 3.5 mm Screw

Hole : 04 , 06 Hole



Cat. 127

NARROW L.C.D.C. PLATE

Hole : 04 To 14



Cat. 124

RECONSTRUCTION PLATE (D.C. HOLE)
For 3.5 mm screw

Hole : 03 To 16



Cat. 128

BROAD D.C. PLATE

Hole : 06 To 16



Cat. 124.C

RECONSTRUCTION PLATE CURVED (D.C. HOLE)
For 3.5 mm screw

Hole : 04 To 14
(2 Hole Variation)



Cat. 129

BROAD L.C.D.C. PLATE

Hole : 06 To 12



Cat. 125

SEMI TUBULAR PLATE

Hole : 04 To 12



Cat. 130

T BUTTRESS PLATE

Hole : 03 To 12



Cat. 126

NARROW D.C. PLATE

Hole : 04 To 14



Cat. 130.H

T BUTTRESS PLATE (HUMERUS)

Hole : 04 To 10



Cat. M126

LM NARROW D.C. PLATE

Hole : 06 To 14



Cat. 131

L BUTTRESS PLATE LEFT & RIGHT

Hole : 03 To 12



Cat. 132

Hole : 04 To 12

LATERAL TIBIAL PLATE LEFT & RIGHT



Cat. 138

Hole : 03 To 16

RECONSTRUCTION PLATE (D.C. HOLE)
For 4.5 mm screw



Cat. 133

Hole : 05 To 12

COBRA PLATE



Cat. 134

Hole : 04 To 12

CLOVERLEAF PLATE



Cat. 135

Hole : 04 To 16

CONDYLAR BUTTRESS PLATE LEFT & RIGHT



Cat. 136

Hole : (3 X 3 X 3 To 3 X 3 X 10)
(4 X 4 X 4 To 4 X 4 X 10)

SHERMAN Y PLATE



Cat. 137

Hole : 03 To 16

RECONSTRUCTION PLATE (ROUND HOLE)
For 4.5 mm screw

Bone Screws



Cat. 139
Length : 12 mm To 60 mm
65 mm To 85 mm
CORTICAL SCREW HEX
Dia.: 3.5mm (20 T. P. I.)



Cat. 144
Length : 25 mm To 120 mm
CANCELLOUS SCREW HEX
Dia. 6.5 mm (16 mm Thread)



Cat. 140
Length : 12 mm To 50 mm
CORTICAL SCREW HEX
Dia.: 3.5mm (14 T. P. I.)



Cat. M144
Length : 25 mm To 110 mm (With Head)
LM CANCELLOUS SCREW
Dia. 6.5 mm X 16TH.



Cat. 141
Length : 16 mm To 70 mm
CORTICAL SCREW HEX
Dia.: 4.5mm (14 T. P. I.)



Cat. 145
Length : 35 mm To 120 mm
CANCELLOUS SCREW HEX
Dia. 6.5 mm (32 mm Thread)



Cat. M141
Length : 20 mm To 62 mm (With Head)
LM CORTICAL SCREW HEX (SELF TAPPING)
Dia.: 4.5mm (14 T. P. I.)



Cat. M145
Length : 35 mm To 110 mm (With Head)
LM CANCELLOUS SCREW
Dia. 6.5 mm X 32TH.



Cat. 142
Length : 14 mm To 35 mm
40 mm To 80 mm
CANCELLOUS SCREW HEX
Dia.: 4.0 mm (16 mm Thread)



Cat. 146
Length : 35 mm To 120 mm
CANCELLOUS SCREW HEX
Dia. 6.5 mm (Fully Thread)



Cat. 143
Length : 14 mm To 35 mm
40 mm To 80 mm
CANCELLOUS SCREW HEX
Dia. 4.0 mm (Fully Thread)



Cat. M146
Length : 35 mm To 110 mm (With Head)
LM CANCELLOUS SCREW
Dia. 6.5 mm X Fully Thread



Cat. 147

Length : 25 mm To 100 mm

MALLEOLER SCREW HEX
Dia.: 4.5 mm



Cat. 148

Length : 16 mm To 30 mm
32 mm To 44 mm

I.L. BOLT 2.9 mm HEX
For 6 mm Humerus I.L. Nail



Cat. 149

Length : 20 mm To 32 mm
34 mm To 50 mm

I.L. BOLT 3.4 mm HEX
For 7, 8 mm Humerus I.L. Nail



Cat. 150

Length : 20 mm To 34 mm
36 mm To 60 mm

I.L. BOLT 3.9 mm HEX
For 08 mm I.L. Nail



Cat. 151

Length : 20 mm To 100 mm

I.L. BOLT 4.9 mm HEX
For 09 mm To 13 mm I.L. Nail



Cat. 152

Length : 12 mm To 34 mm

HERBERT SCREW
(HEAD - 4.5 mm & TAIL - 3.5 mm)



Cat. 153

Length : 00 mm, 05 mm

CAP FOR HUMERUS NAIL

Intramedullary Nail

NEBULA[®]



Cat. 154

Length : 20 cm To 30 cm

INTERLOCKING NAIL FOR HUMERUS IN 1 C.M. VARIATION
(SOLID & CANULATED)
Dia.: 6,7,8 mm



Cat. 157.S

Length : 22 cm

SHORT RE-CON NAIL
Dia.: 09 mm To 12 mm



Cat. 155.13

Length : 28 cm To 38 cm

INTERLOCKING NAIL FOR TIBIA IN 1 C.M. VARIATION
(13 mm Design)
Dia. 08 mm To 11 mm



Cat. 158

Length : 34 cm To 44 cm

K - NAIL FOR FEMUR
Dia.: 08 mm To 12 mm



Cat. 155.D

Length : 285 mm To 405 mm

INTERLOCKING NAIL FOR TIBIA (DISTAL JIG)
IN 1.5 C.M. VARIATION
Dia. 08 mm To 11 mm



Cat. 160

Length : 18 cm To 34 cm

RUSH NAIL
Dia.: 1.5 mm To 4.0mm



Cat. 156.13

Length : 34 cm To 44 cm

INTERLOCKING NAIL FOR FEMUR IN 2 C.M. VARIATION
(13 mm Design)
Dia. 09 mm To 12 mm



Cat. 161

Length : 18 cm To 34 cm

SQUARE NAIL FOR RADIUS & ULNA
Dia.: 2.0 mm TO 4.0 mm



Cat. 156.D

Length : 330 mm To 450 mm

INTERLOCKING NAIL FOR FEMUR IN 1.5 C.M. VARIATION
(DISTAL JIG)
Dia. 09 mm To 12 mm



Cat. 162

Length : 14 cm To 46 cm

ENDER'S NAIL
Dia.: 2.0 mm To 4.5 mm



Cat. 157

Length : 34 cm To 44cm

RE-CON NAIL - RIGHT & LEFT IN 2 C.M. VARIATION
Dia.: 09 mm To 12 mm



Cat. 165

Hole : 05, 08, 11

CERVICAL H SPINAL PLATE



Cat. 166

Length : 04", 06", 09", 12"

"K" WIRE (DOUBLE ENDED)
Dia.: 0.8 mm To 3.0 mm



Cat. 165.W

WASHER SPIKE



Cat. 167

Length : 06" , 09"

THREADED "K" WIRE
Dia.: 1.0 mm To 3.0 mm



Cat. 168

Length : 20 cm To 40 cm

"L" WIRE (LAMBRINUDI)
Dia.: 1.5 mm To 4.5 mm



Cat. 169

Size : 16 swg To 26 swg

S.S. WIRE REEL



Cat. 169.L

Size : 16 swg To 26 swg

S.S. WIRE LOOP (04 mtr)



Cat. 171

Size : 0.8, 1.0, 1.2, 1.5 mm

CERCLAGE WIRE



Cat. 172

Length : 10 mm To 30 mm

"U" TYPE STAPLES
Dia.: 1.5 mm To 3.0 mm



Cat. 174

Length : 06", 07", 09"

STEINMAN PIN
Dia.: 3.0 To 4.5 mm • 5.0 To 6.0 mm



Cat. 173

COVENTARY STAPLES
Small / Medium / Large



Cat. 174.D

S.T. PIN FOR DISTAL DEVICE
Dia.: 2.5 , 3.0 , 3.5 mm



Cat. 175

Length : 09"

DENHAM PIN
Dia.: 4.0 mm To 5.0 mm



Cat. 176

Length : 04" To 08"

SCHANZ SCREW
Dia.: 2.0 mm To 5.0 mm



Cat. 176.C

Length : 09"

SCHANZ SCREW (CANCELLOUS THREAD 6.5 mm)
Dia.: Shaft Dia. 4.5 mm (16" & 32")



Cat. 176.S

Length : 06", 08"

SELF DRILLING SCHANZ SCREW
Dia.: 4.5 mm, 5.0 mm



Cat. 176.T

TAPPER THREAD SCHANZ SCREW
Dia.: 6.0 mm (32 & 52 Thread)

Length : 06", 08"



Cat. 180

PROXIMAL FEMORAL NAIL SHORT (P.F.N.)
Dia. : 09, 10, 11, 12 mm (130° & 135°)

Length : 25 cm



Cat. 176.THA4060

SCHANZ PIN TAPPER.TH.(HA COATED)
40THX6.0 MM

Length : 07"



Cat. 180.L/R

PROXIMAL FEMORAL NAIL LEFT & RIGHT (P.F.N.)
Dia. : 09, 10, 11, 12 mm

Length : 34 cm To 44 cm



Cat. 176.THA5260

SCHANZ PIN TAPPER.TH.(HA COATED)
52THX6.0 MM

Length : 07"



Cat. 181

SUPRA CONDYLAR NAIL (I.M.S.C.)
Dia. : 10, 11, 12, 13 mm

Length : 15 cm To 30 cm



Cat. 177

HIP TRACTION SCREW
Dia.: 4.5,6.5,8.0 mm

Length : 10"



Cat. 182

CAP FOR RECON, P.F.N., I.M.S.C., CYRUS NAIL
13mm DESIGN TIBIA & FEMUR NAIL

Length : 0 mm, 05 mm, 10 mm



Cat. 178

PROXIMAL BOLT 8.0 MM (FOR P.F.N., T.F.N. NAIL)

Length : 50 mm To 120 mm



Cat. 183

CAP FOR TIBIA & FEMUR NAIL

Length : 0 mm, 05 mm, 10 mm



Cat. 179

PROXIMAL BOLT 6.4 MM
(FOR P.F.N., T.F.N., RECON, CYRUS FEMUR NAIL)

Length : 50 mm To 120 mm



Cat. 184

INTERLOCKING NAIL FOR TIBIA SOLID IN 2 C.M. VARIATION
Dia.: 08,09,10 mm

Length : 28 cm To 38 cm



Cat. 185

Length : 34 cm To 44 cm

INTERLOCKING NAIL FOR FEMUR SOLID IN 2 C.M. VARIATION
Dia.: 09 mm To 12 mm



Cat. 191

Length : 28 cm To 38 cm

MULTIFUNCTION TIBIA NAIL
Dia. 08,09,10 mm



Cat. 186

Length : 28 cm To 38 cm

CYRUS TIBIA IN 2 C.M. VARIATION
Dia. 08 mm To 10 mm



Cat. 192

Length : 60 To 120 mm

PROFAAN BLADE



Cat. 187

Length : 34 cm To 44 cm

CYRUS FEMUR IN 2 C.M. VARIATION (LEFT & RIGHT)
Dia. 09 mm To 12 mm



Cat. 193

Length : 170,200,240 mm

PROFAAN 130*
Dia. :- 09 To 12 mm



Cat. 188

Length : 28 cm To 38 cm

TIBIA NAIL (UPPER BEND)
Dia. 08 mm To 10 mm



Cat. 193.L/R

Length : 32 To 44 cm

PROFAAN LONG 130*
Dia. :- 09 To 12 mm



Cat. 189

Length : 18 cm

TROCHANTERIC FEMORAL NAIL (T.F.N.)
Dia. 09, 10, 11, 12 mm (130° & 135°)



Cat. T196.L/R

Length : 34 To 44 cm

T196 TIT ANTEGRADE FEMORAL NAIL
Dia. :- 09 To 11 mm



Cat. 190

Length : 44 cm

ELASTIC NAIL
Dia. 2.0, 2.5, 3.0, 3.5, 4.0, 4.5 mm

Mini Plate & Screw
(Dai. 1.5,2.0,2.5 mm)

NEBULA®



Cat. S101/TS101

Hole : 02 To 20

MINI STRAIGHT PLATE (WITHOUT GAP)



Cat. S107/TS107

MINI "X" PLATE



Cat. S101.G/TS101.G

Hole : 02 To 10

MINI STRAIGHT PLATE (WITH GAP)



Left



Right

Cat. S108/TS108

MINI "Z" PLATE (LEFT & RIGHT)

Hole : 04



Cat. S102/TS102

Hole : 02 To 03

MINI "T" PLATE SMALL (WITH HEAD 2 HOLE & 3 HOLE)



Cat. S109/TS109

Hole : 04 , 06

MINI CURVED PLATE (LEFT & RIGHT)



Left



Right

Cat. S103/TS103

Hole : 02 To 03

MINI "L" PLATE 90° (LEFT & RIGHT)



Left



Right

Cat. S110/TS110

Hole : 04,06

MINI ANGULAR PLATE 150° (LEFT & RIGHT)



Cat. S105/TS105

Hole : 06

MINI "I" PLATE



Cat. S111/TS111

Hole : 04 , 06

MINI ORBITA PLATE (WITH GAP)



Cat. S106/TS106

Hole : 5 To 6

MINI "Y" PLATE (SINGLE & DOUBLE)



Cat. S112/TS112

Hole : 04 , 06

MINI ORBITA PLATE (WITHOUT GAP)



Cat. S113/TS113

Hole : 02 To 20

MINI RECONSTRUCTION PLATE



Cat. S120/TS120


Hole : 20 To 24

ANGLE RECONSTRUCTION PLATE LEFT & RIGHT



Cat. S114/TS114

MINI NOSE PLATE ("H" SHAPE)



Cat. S122/TS122

1" X 1"

WIRE MESH



Cat. S114/TS114

MINI NOSE PLATE ("Y" SHAPE)



Cat. TS122.P

PRE BENDED MESH

060" X 060", 060" X 080" MM
100" X 100", 120" X 120" MM
120" X 150", 120" X 180" MM



Cat. S115/TS115

MINI 3D SQUARE PLATE



Cat. TS123

TIT ORBITAL FLOOR MESH

EXTRA SMALL, SMALL, BIG



Cat. S116/TS116

MINI CHIN PLATE



Cat. S123

ARCH BAR

1 FEET



Cat. S117

Hole : 04 To 10

DYANAMIC COMPRESSION PLATE (D.C.P.)
PLATE FOR 2.5 & 2.7 MM SCREW



Cat. P121.S

PEEK CERVICS SPACER WITH SCREW (STERILE)

5", 6", 7", 8"



Cat. S130/TS130

Length : 04 mm To 12 mm

MINI SCREW 1.5 mm SLOT



Cat. S131/TS131

Length : 04 mm To 14 mm

MINI SCREW 2.0 mm SLOT (32 TPI)



Cat. S132/TS132

Length : 06 mm To 16 mm

MINI SCREW 2.5 mm SLOT (32 TPI)



Cat. S133

Length : 06mm To 14mm

I.M.F. (INTRA MAXILLARY FIXATION) SCREW SLOT



Cat. S140.25/T140.25

Length : 08 mm To 30 mm

CORTICAL SCREW 2.5 mm HEX (24 TPI)



Cat. S140.27/T140.27

Length : 10 mm To 34 mm

CORTICAL SCREW 2.7 mm HEX (24 TPI)



Cat. 201.001

Size : 4.5 X 8.0 mm

AESCULAP CLAMP



Cat. 201.002

Size : 8.0 X 8.0 mm

ROD TO ROD CLAMP



Cat. 201.003

Size : 04" TO 16"

CONNECTION ROD
Dia.: 8.0 mm



Cat. 202.001

Size : 2.5 X 4.0 mm

AESCULAP CLAMP



Cat. 202.002

Size : 4.0 X 4.0 mm

AESCULAP CLAMP



Cat. 202.003

Size : 4" To 16"

CONNECTION RODS
Dia.: 4.0 mm



Cat. 203.001

Size : 4.5 X 11 mm

A.O. TYPE CLAMP



Cat. 203.006C

UNIVERSAL JOINT WITH 2 CLAMP



Cat. 203.001

Size : 6.0 X 11 mm

A.O. TYPE CLAMP



Cat. 203.006

UNIVERSAL JOINT FOR TWO ROD



Cat. 203.002

Size : 11 X 11 mm

ROD TO ROD CLAMP



Cat. 203.007

TRANSVERSE CLAMP PIN ADJUSTABLE



Cat. 203.003

Length : 6" To 18"

CONNECTION RODS
Dia.: 11 mm



Cat. 203.009

Size : FOR 4.5 & 6.0 mm

T-HANDLE FOR SCHANZ SCREWS / STEINMAN PIN



Cat. 203.004

Size : 4.5 X 11 mm

A. O. TYPE DOUBLE PIN CLAMP



Cat. 203.011

THREADED ROD WITH 3 TUBE & NUTS (D.A.)



Cat. 203.005

Size : 4.5 X 11 mm

OPEN CLAMP



Cat. 204.001

Size : 2.5 X 4.0 mm

A. O. TYPE CLAMP



Cat. 204.002
A. O. TYPE CLAMP

Size : 3.5 X 4.0 mm



Cat. 209
5/8 RING

Length : 130 mm To 200 mm



Cat. 204.003
A. O. TYPE CLAMP

Size : 4.0 X 4.0 mm



Cat. 210
ITALIAN FEMORAL ARCHES
Angle :- 90°, 120°

Length : 140 mm To 200 mm




Cat. 205.001
BALL TYPE CLAMP



Cat. 211
THREADED ROD (06 mm)

Length : 100 mm To 400 mm



Cat. 205.002
DISTRACTOR UNIT

Length : 6" To 12"



Cat. 211.S
THREADED ROD SLOTTED (06 mm)

Length : 60 mm To 80 mm



Cat. 205.003
BALL & SOCKET SPANNER



Cat. 212
TELESCOPIC ROD

Length : 100 mm To 250 mm



Cat. 207
HALF RING

Length : 80 mm To 220 mm



Cat. 212.G
TELESCOPIC ROD GRADUATED

Length : 80 mm To 120 mm



Cat. 213.001
HINGES (MALE END 1 HOLE)



Cat. 214.M
POST MALE

Hole : 01 To 04



Cat. 213.002
HINGES (FEMALE END 1 HOLE)



Cat. 214.F
POST FEMALE

Hole : 01 To 04



Cat. 213.003
90 DEGREE HINGES



Cat. 215
OBLIQUE SUPPORT



Cat. 213.SM
SINGLE JOINT M TO F



Cat. 216
CURVED PLATE



Cat. 213.SF
SINGLE JOINT F TO F



Cat. 217.S
SHORT CONNECTION PLATE

Hole : 02 To 07



Cat. 213.U
UIVERSAL JOINT



Cat. 217.L
LONG CONNECTION PLATE

Hole : 08 To 10



Cat. 217.T

Hole : 01 To 03

TWISTED PLATE



Cat. 218.001

CONNECTING BOLT



Cat. 218.002

NUT



Cat. 218.002.S

SQUARE NUT



Cat. 218.003
WIRE FIXATION BOLT (SIDE SLOTTED)



Cat. 220 Length : 1.8 mm X 16"
TENSION K-WIRE (TROCAR TIP & BIONET TIP)



Cat. 218.004
WIRE FIXATION BOLT (CENTRE HOLE)



Cat. 221 Length : 1.8 mm X 16"
OLIVE WIRE (BINET & TROCAR TYPE)



Cat. 218.005
MULTIPLE PIN FIXATION BOLT



Cat. 221
OLIVE WIRE (BINET & TROCAR SEAMLESS TYPE)



Cat. 218.006 Size : For 4.5 & 6.0 mm
SINGLE PIN FIXATION BOLT



Cat. 222.001
WASHER (SIMPLE)



Cat. 218.008 Hole : 01 To 04
WRENCHO CUBE



Cat. 222.002
WASHER (SLOTTED)



Cat. 219.002 Size : 30 mm To 60 mm
THREADED SOCKET



Cat. 222.003
WASHER (CONICAL COUPLE)



Cat. 223.001
WIRE TENSIONERS (SIMPLE)



Cat. 206.001
ALPHA CLAMP 06 X 10 mm



Cat. 223.002
WIRE TENSIONERS (GRADUATED)



Cat. 206.002
BETA CLAMP 08 X 12 mm



Cat. 224
Length : 6 mm To 11 mm
SPANNER ORDINARY



Cat. 206.003
BETA CLAMP 08 X 15 mm



Cat. 225
Length : 8,10,11 mm
T-HANDLE SPANNER



Cat. 206.004
BETA CLAMP AD ON



Cat. 217.TE
Size : 5H, 7H, 9H, 11H
CONNECTION PLATE WITH THREADED END



Cat. 206.005
Length : 100 mm x 60 mm x 100 mm
SINGLE PIN DISTRACTOR



Cat. 206.006
Length : 100 mm x 150 mm
200 mm
DOUBLE PIN DISTRACTOR (M4)



Cat. 206.006.B Length : 150 mm , 200 mm , 250 mm , 300 mm
DOUBLE PIN DISTRACTOR (M6)



Cat. 206.012 Length : 200 mm , 250 mm , 300 mm
350 mm , 400 mm
STRAIGHT ROD 4.0 MM



Cat. 206.007 Length : 150 mm , 200 mm , 250 mm , 300 mm
FISH MOUTH DISTRACTOR



Cat. 206.013 Size : 2.5 mm (35 x 35 mm)
3.0 mm (50 x 50 mm)
4.0 mm (75 x 75 mm)
SMALL "L" ROD



Cat. 206.008 Length : 50 X 75 mm
PIP DISTRACTOR



Cat. 206.014 Size : 2.5 mm (50 x 50 mm)
3.0 mm (60 x 60 mm)
4.0 mm (90 x 90 mm)
LARGE "L" ROD



Cat. 206.009 Length : 75 mm , 100 mm , 150 mm
STRAIGHT ROD 2.0 MM



Cat. 206.015 Size : 2.5 mm (60 x 45 x 60 mm)
3.0 mm (80 x 50 x 80 mm)
4.0 mm (100 x 60 x 100 mm)
"Z" ROD



Cat. 206.010 Length : 75 mm , 100 mm , 150 mm
200 mm , 250 mm
STRAIGHT ROD 2.5 MM



Cat. 206.016 Dia : 2 , 3 mm
ALLEN KEY



Cat. 206.011 Length : 100 mm , 150 mm , 200 mm
250 mm , 300 mm
STRAIGHT ROD 3.0 MM



Cat. T103
Length : 14 mm To 35 mm
40 mm To 80 mm
TIT CANNULATED CANCELLOUS SCREW HEX (C.C.SCREW)
Dia.: 4.0 mm (16 mm Thread)



Cat. T199
Tit Eight Plate
Length : Small ,Medium, Large



Cat. T104
Length : 14 mm To 35 mm
40 mm To 80 mm
TIT CANNULATED CANCELLOUS SCREW HEX (C.C.SCREW)
Dia.: 4.0 mm (Fully Thread)



Cat. T199.D
Tit Eight Dynamic
Compression PLate
Length : 12mm, 16mm, 20mm



Cat. T142
Length : 14 mm To 35 mm
40 mm To 80 mm
CANCELLOUS SCREW HEX
Dia.: 4.0 mm (16 mm Thread)



Cat. T143
Length : 14 mm To 35 mm
40 mm To 80 mm
CANCELLOUS SCREW HEX
Dia. 4.0 mm (Fully Thread)



NEBULA SURGICAL PVT. LTD.

Office: "Nebula" 2nd Floor, Narmada Park-3,
Opp. King's Height, Vidhya Kunj Society Main Road,
Amin Marg, Rajkot-360005.
Ph. : +91 281 258 48 32 / 33,

Factory : G-1921/3, Almighty Gate Main Road,
G.I.D.C. Metoda-360021. Gujarat (INDIA)
Phone: +91 2827 287570.

Web : www.nebulasurgical.com
Email : info@nebulasurgical.com
export@nebulasurgical.com